



ARCADE FLOORING SPECIFICATIONS

PRODUCT INFORMATION

CONSTRUCTION	Engineered format with a HDF core & Chinese Poplar backer
PLANK DIMENSIONS	5" wide, 36-1/4" long, 7/16" thick / 2.5mm wear layer
MILLING	4-sided micro-bevel / Uniclic [®] locking system
FINISH	8-step Treffert [®] aluminum oxide finish
COLOR VARIANCE	Bamboo is a natural product, thus colors and tones may vary.
ADHESIVES	Dynea Prefere Adhesives. No added Urea Formaldehyde
INSTALLATION	Float or glue. Radiant floor heating compatible Below, on, or above grade
HARDNESS	Janka Hardness Rating of 3,000+
ENVIRONMENTAL	CARB II Compliant / LEED [®] Credits IEQ4.4 and MR6 / FloorScore [®] Certified

PACKAGING



BOX WEIGHT: 44LBS	CONTAINER: 36 Boxes/Pallet	PALLETS / 20' CONTAINER: 22
PLANKS PER BOX: 20	SQFT PER BOX: 24.75	PALLETS / 40' CONTAINER: 26

WARRANTY


FINISH	50-year Residential / 5-year Light Commercial
STRUCTURE	Lifetime Structural Warranty

RESOURCES


Download the latest versions of our installation and maintenance guides, as well as watch installation videos, at www.bamboohardwoods.com

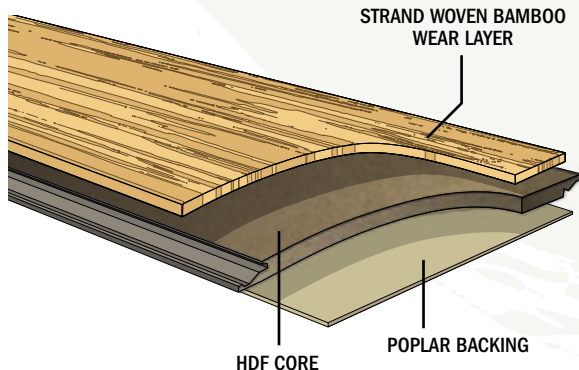


DRIFTWOOD 55590




HONEY 55500




LUNA 55594



MOCHA 55501




NOVO 55509



ONYX 55596



TAWNY 55592



UMBER 55598

